BLOWER CONTROL
BC-7070-A/M
"ON/OFF" TIME DELAY RELAY

TYPICAL WIRING DIAGRAM:
Showing connections when using BC Series Blower Controls.

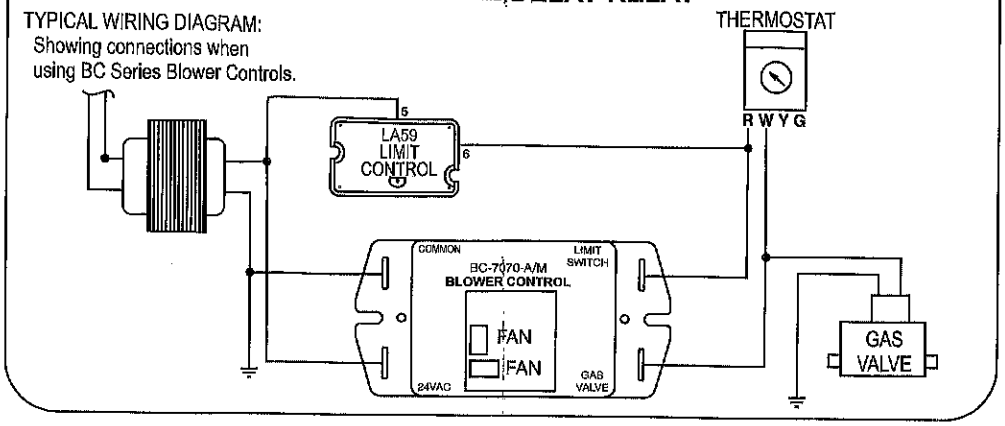

DIMENSIONS:

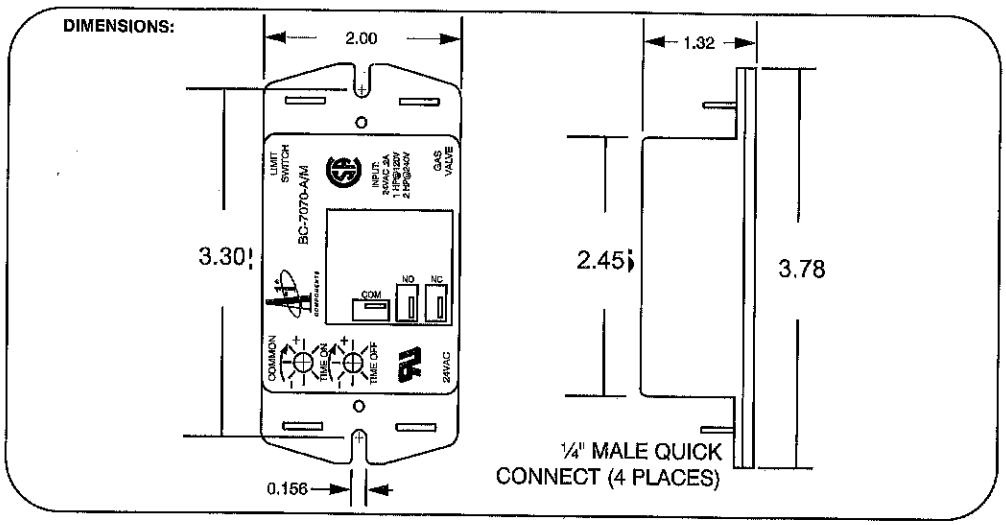

1. **INPUT**
   Voltage: 18-30 volts AC, 50/60 Hertz
   125 milliamps max.
2. **OUTPUT**
   1 HP @ 120 VAC
   2 HP @ 240 VAC
   Consult factory for additional ratings.
3. **TIME DELAY**
   Adjustable ON & OFF 0-4 MIN.
   Tolerance: ±20%
4. **MECHANICAL**
   Mounting: Surface mount with 2-#6 screws.
   Package: Molded ABS housing.
   Circuit: Conformal coated circuit board.
   Connections: .250" male quick connect terminals.
5. **ENVIRONMENTAL**
   Operating Temperature: -40°F to +175°F.
   Storage Temperature: -40°F to +185°F
   Humidity: To 95%rh non-condensing.
6. **U.L.** FILE #MH-3917
   C.S.A. FILE #LR-9275-35

A-1® COMPONENTS
163636b

Henry Technologies, Inc.
701 S. Main Street, Chatham, IL 62629
Tel: 217 483 2406 Fax: 217 483 2408
www.henrytech.com or www.a-1components.com