


AC POWER SUPPLY: 120 VAC TO 24 VAC

PSB40AB10



Panel Mount 40 VA Power Supply, 120 to 24 Vac

PSB100AB10

Panel Mount 100 VA Power Supply, 120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

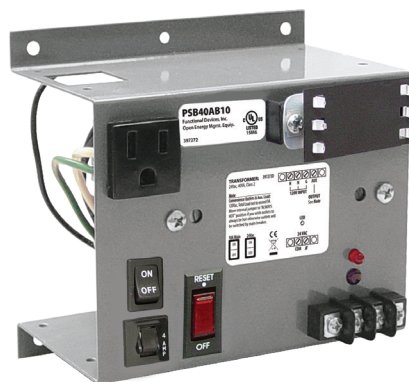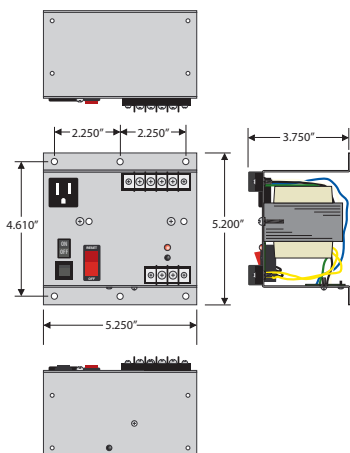

Made in USA
Meets
"Buy American"
of ARRA 2009

REMOVABLE TERMINAL COVER PROVIDED

POWER SUPPLIES

SPECIFICATIONS

Transformer: One 40 VA Split-Bobbin (PSB40AB10)
One 100 VA Split-Bobbin (PSB100AB10)

Primary: 120 Vac

Secondary: 24 Vac, w/ LED Indicator

Frequency: 50/60 Hz

Over Current Protection: Inherently Limited + Circuit Breaker (PSB40AB10)
Circuit Breaker (PSB100AB10)

24 Vac ON/OFF: On / Off Switch

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit:
Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Mounting: Panel mount

Approvals: Class 2 (UL Approved
UL5085-3), UL916, UL508,
C-UL, CE, RoHS

Dimensions: 5.200" x 5.250" x 3.750"

Weight: 2.18 lbs. (PSB40AB10)
3.58 lbs. (PSB100AB10)

Notes:

• To order UL508, add "-IC" to end of
model number.