


AC Leak Freeze® PRO Series

Quickly and safely extend the life of A/C and refrigerant systems.



*Non-clogging to compressors, recovery units, schrader valves, cap tubes, TXV valves, micro channels, evacuation equipment and gauges.

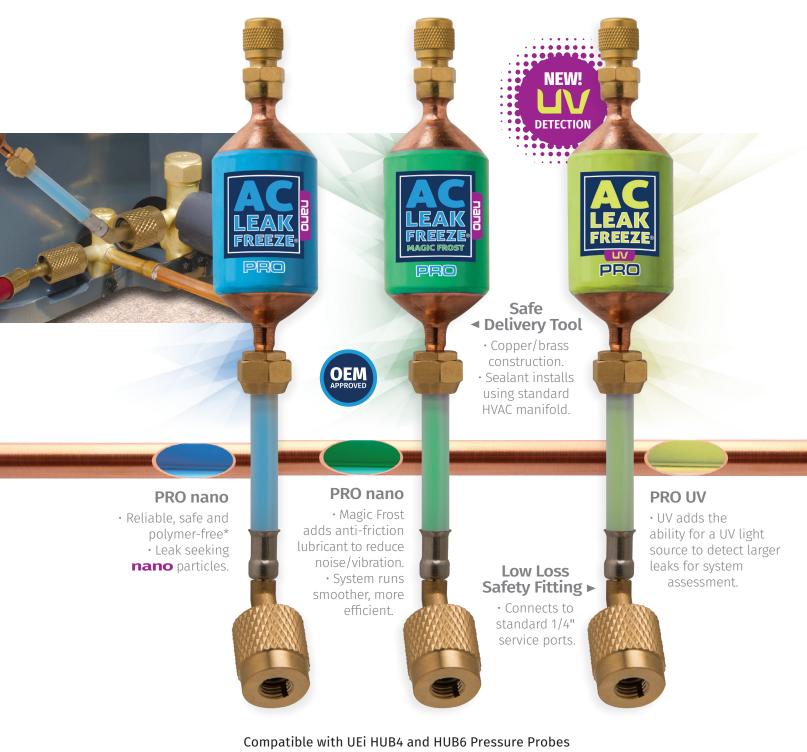

MAINTENANCE SOLUTIONS

AC Leak Freeze® PRO

Code	AC Leak Freeze PRO	Qty
45316	1.46 oz. nano	12
45317	1.46 oz. nano Magic Frost	12
45318	1.46 oz. UV	12

FEATURES

- Single use disposable
 Polymer free nano formula
 Safe for system
- Ready to use Non-flammable
- Non-Toxic
- Compatible with UEi HUB4 and HUB6 pressure probes
- POP packaged



Leak sealant & system enhancer

APPLICATION • Revitalizes A/C & refrigeration systems by permanently sealing small, hard-to-find micro gas leaks • Infuses into system through standard ¼-in service port using an HVAC Manifold
• For use in coils • Non-clogging to compressors, recovery units, schrader valves, cap tubes, TXV valves, micro channels, evacuation equipment and gauges

Compatible with all refrigerants
Magic Frost formula enhances system performance reducing compressor noise and extend compressor life.
UV formula adds the ability for a UV light source to detect larger leaks for system assessment.

U.S. Patent Pending





AC Leak Freeze® PRO

Code	AC Leak Freeze PRO	Qty.
45309	0.5 oz./15 mL nano Mini-split	12
45308	0.5 oz./15 mL UV Mini-split	12



FEATURES

- Single use disposable Polymer free nano formula
- Safe for system
- Ready to use
- Non-flammable
- Compatible with UEi HUB4 and HUB6 pressure probes
- POP packaged

Mini-split system leak sealant

- APPLICATION Revitalizes Mini-split A/C systems by permanently sealing small, hard-to-find micro gas leaks • Infuses into system through standard 1/4-in or 5/16-in service port using an HVAC manifold or with proper refrigerant gas container • For use in copper and aluminum coils • Non-clogging nano formula • Compatible with all refrigerants • UV formula adds the ability for a UV light source to detect larger leaks for system assessment.
- For use in systems up to 2 tons or 24,000 BTUs

U.S. Patent Pending

WARNING This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

RectorSeal[®] · 2601 Spenwick Drive - Houston, TX 77055 · 800-231-3345 · rectorseal.com PO Box 5092 Hoppers Crossing, VIC 3029, Australia 07-3267-7277 rectorseal.com.au

RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. © 2020 RectorSeal. All rights reserved. R50344 0820