



## AC TRANSDUCER

### RIBMXV

4.00" Track Mount Internal 0-20 Amp to 0-5 Vdc /  
0-10 Vdc Self-Powered AC Transducer

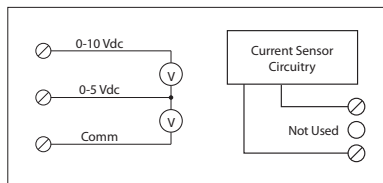

## SPECIFICATIONS

**Operating Temperature:** -30 to 140° F

**Humidity Range:** 5 to 95% (noncondensing)

**Dimensions:** 1.700" x 4.000" x 1.250"

**Track Mount:** 4.000", See MT4 Series on page 152

**MT4 Mounting Track Sold Separately**

**Approvals:** UL Listed, UL916, UL864, C-UL  
California State Fire Marshal, CE, RoHS

**Sensor Type:** Internal, with voltage output

**Sensor Range:** 0-20 Amps

**Max Sense Voltage:** 300 Vac

### Sensor Output:

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 1% full scale
- Vripple < 10m Vac