

SVFTM | STAINLESS
VERTICAL
FIRETUBE

Firetube
performance,
perfected.

INDUSTRY
LEADING
EFFICIENCY



Introducing the power of stainless: our state-of-the-art firetube boiler.


Guarding against wear and tear with its corrosion resistant and durable materials, Weil-McLain's new Stainless Vertical Firetube boiler delivers energy efficiency and reliability.

A leading-edge addition to our commercial boiler portfolio, it meets all standard bid specs for new construction with the following features:

- Industry-leading thermal efficiency up to 97.1% (model dependent)
- Available in 2 sizes: 750 and 1,100 MBH
- Clover-shaped vertical stainless steel firetube heat exchanger provides best-in-class corrosion resistance
- Removable and replaceable condensate base
- Hinged cover plate allows for quick access to burner and firetubes, making maintenance a breeze
- Advanced *Unity*TM control system (70 - 2,000 MBH compatibility) with built-in set-up wizard
- Available in natural gas and liquid propane models
- 160 psi working pressure
- Contractor-friendly ease of installation and serviceability
- Weil-McLain built-to-last reliability and longevity



Dimensions and Product Specifications

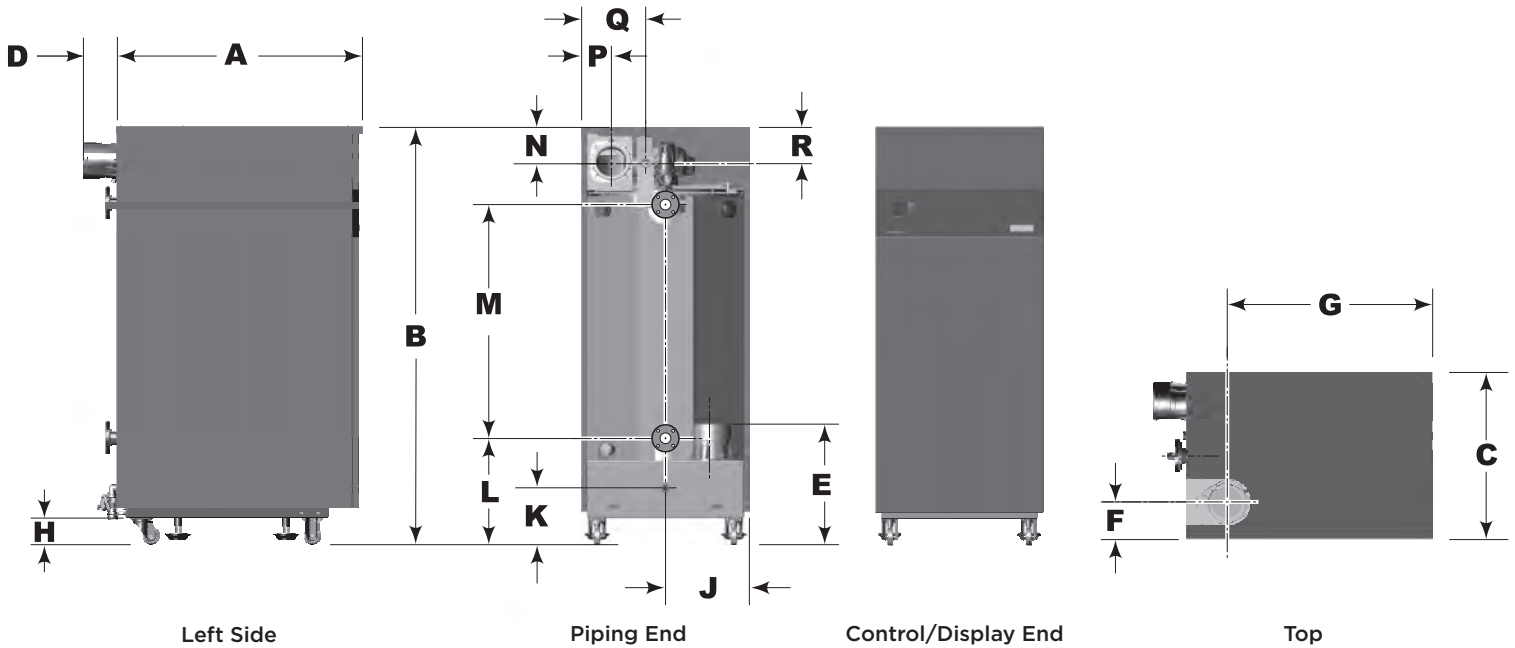

Model No.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R
SVF 750	46 5/16"	79 3/8"	31 5/8"	6 5/16"	22 15/16"	6 7/8"	38 11/16"	5 1/4"	15 3/4"	11"	20 3/8"	44 3/8"	6 7/16"	5 1/4"	12"	6 15/16"
SVF 1100	50 7/8"	79 3/8"	35 5/16"	5 11/16"	22 15/16"	7 3/16"	42 13/16"	5 1/4"	17 3/4"	11"	20 3/8"	43 3/4"	6 7/16"	5 5/16"	13 9/16"	5 7/16"

(height dimensions based on 5 1/4" spacing from floor to bottom)

Model No.	Thermal Efficiency	Max Pressure (psi)	Max Input (MBH)	Gross Output (MBH)	Net AHRI Rating (MBH)	Turn Down	Water Conn	Gas Conn	Air/Intake Vent Size	Length	Width	Height	Shipping Weight (lbs)
SVF 750	96.3%	160	785	756	657	5:1	2" Flange	1 1/4"	6"	46.5"	31.5"	79.1"	1,565
SVF 1100	97.1%	160	1,134	1,101	957	5:1	3" Flange	1 1/4"	6"	51.0"	35.4"	79.1"	1,875

Industry Leading Efficiency

- Up to 97.1% Thermal Efficiency*
- ASME Certified Stainless Steel Firetube Heat Exchanger and Shell
- "Clover" tube design for max heat transfer
- 160 psi Working Pressure
- 30 psi Relief Valve
- Pickled and Passivated Welded Design

Modulating, Low Emissions Burner Design

- Natural Gas or Propane
- Down to <20 ppm NOx Emissions*
- 5:1 Turndown Ratio
- Low Gas Pressure Operation
- Direct Spark Ignition
- Variable Speed Blower Assembly
- Venturi Mixing System
- Negative Pressure Regulated Gas Valve
- 50 VA Transformer
- Temperature & Pressure Gauge
- Outdoor Water Temp. Sensor
- Outlet & Inlet Water Temp. Sensor
- Flue Gas Temp. Sensor
- System Water Temp. Sensors
- Immersion Style - Supply & Return

Venting Options

- Direct Exhaust - Sidewall & Vertical (CAT II)
- Direct Vent - Sidewall, Vertical, & Side Intake with Vertical Exhaust (CAT II)
- Direct Exhaust - Vertical (CAT IV)

*model dependent

Complete Jacket Assembly

- Fully Removable Jacket
- Rugged, Steel Frame & Panels
- Manual Reset Push Button through Display

Easy Install / Serviceability

- Easy Set-up with Control Wizard
- Industrial-Grade Roller Casters
- Shipping Crate Ramp
- Hinged Cover Plate
- "Door-Fit" Design
- Zero-Clearance to Combustibles
- Low-Profile, Stainless Steel Burner with Woven Steel Fiber Mesh
- Removable, Stainless Steel Condensate Tray
- Single-Point Installation
- All Field Connections out Back of Boiler

Multiple Boiler Features

- Up to 8 Boilers, Multiple System functionality with Lead/Lag Capability
- Series, Parallel, or Smart Sequencing™
- Lead Boiler Rotation
- Variable Primary Flow Design Capable
- (3) Boiler Priorities Capability
- Either (2) network and (1) local or (1) network and (2) local
- (24) Zone Inputs and Outputs with (8) Total Cascaded
- Boiler via Zone Stacking™
- Aux Inputs - Flow End or Switch End
- System Aux Outputs - System Pump or Damper

Control Features

- 120 VAC / 60 Hertz / 1 Phase
- Operating Status Color LCD Display
- Preset Operating Parameters Including Typical Heating Systems
- Configurable Outdoor Reset
- Rate Setting for Each Input/Output
- 0-10V Input (Modulation or Set Point)
- Standard Modbus Connectivity
- Additional Heat Demand Functionality
- Contact with 0-10V Output
- Labeled Terminal Blocks for Field Terminations
- Ignition Control
- High Limit & Modulating Temp. Control
- Alarm Control Functionality
- Onboard Time & Date
- Low Water Cut-Off
- Manual Reset
- Warm Weather Shutdown
- Freeze Protection
- Boiler Service Interval & Contractor Info

CSD-1 Compliant

- Manual Reset LWCO
- Manual Reset High & Low Gas Pressure Switches
- UL 353 Certified High Limit Control with Manual Reset
- UL 353 Certified Operating Control

Non-Pro-Rated Warranty

- 10 Year Heat Exchanger Warranty
- 2 Year Parts Warranty

Optional Equipment

- Pressure Relief Valve - 30 / 50 / 80 / 100 / 150 psi
- System Water Temp. Sensors
- Strap-On - Supply & Return
- BacNet or LonWorks Converter Kit
- Annual Maintenance Kit
- Corrosion Inhibitor
- Condensate Neutralizer Kit
- Anti-Freeze

Boiler Certifications

- ASME IV, CSA, AHRI, Commercial Energy Star, SCAQMD

In the interest of continual improvements in product and performance, Weil-McLain reserves the right to change specifications without notice.

Weil-McLain offers BIM-Revit product content to help architects, engineers and contractors design projects accurately and efficiently.



www.weil-mclain.com