







sales@functionaldevices.com





## **TR50VA008**

 $Transformer\,50\,VA,\,480/277/240/208\,to\,120\,Vac,\,Circuit\,Breaker,\,Foot\,and\,Dual\,Threaded\,Hub\,Mount\,Aller and\,Aller and Aller a$ 

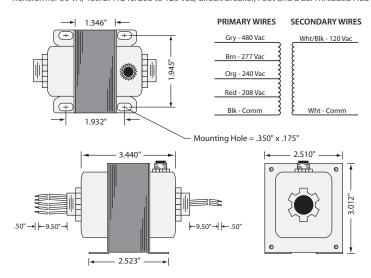



## **SPECIFICATIONS**

VA Rating: 50 Frequency: 50/60 Hz

Mounting: Foot & Dual Threaded Hubs

Over Current Protection: Circuit Breaker

**Dimensions:** 3.440" x 2.510" x 3.012" (w/ .500" NPT Hubs)

Wire Length: 9.5"Typical w/ .5" Strip Operating Temperature: -30 to 140° F MTBF: 100,000 Hours @ 77° F

Construction: Split-Bobbin

Weight: 3.04 lbs.

Approvals: UL5085-2 Listed, US / Canada, CE, RoHS