

tekmar[®] Submittal

24 V (ac) Transformer Kit 009K



Accessories

009K_C


05/14

Replaces: 11/12

Job _____ Designer _____ Contact _____

The Transformer Kit 009K is a 40 VA, 24 V (ac) transformer for use with products that require an external transformer. It includes an in-line fuse for circuit protection, and a 4" x 4" electrical J-Box for mounting.

Includes:
4" x 4" Electrical Box
tekmar 009 Transformer

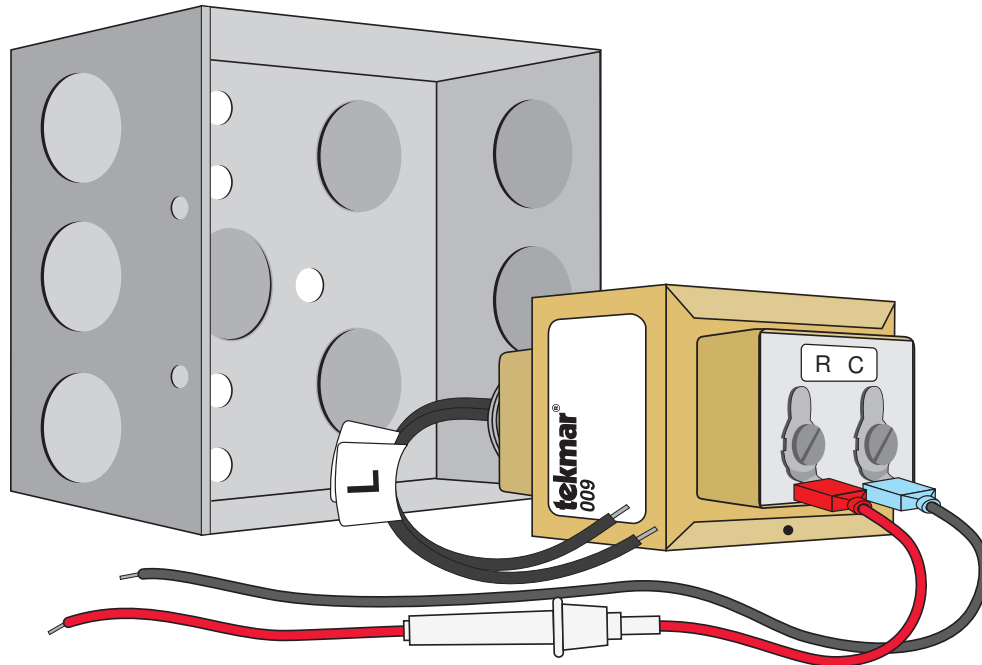

Specifications

| 24 V (ac) Transformer Kit 009K 40 VA, includes Mounting Box | |
|--|---|
| Literature | 009_D |
| Packaged weight | 2.5 lb (1150 g) |
| Dimensions | Transformer 2" W x 2-1/4" L x 2-1/2" D (51 x 57 x 64 mm) Electrical Box 4" W x 4" L x 2-1/4" D (102 x 102 x 57 mm) |
| Approvals | CSA standard C22.2 #66 part B & UL 5085 |
| Ambient conditions | Indoor use only, 32 to 104°F (0 to 40°C) |
| Input power supply | 120 V (ac) ± 10%, 60 Hz |
| Output power available | 24 V (ac) ± 10% 60 Hz, 1.67A, 40 VA, Class 2 |
| Supplied fuse rating | T2 A 250 V slow-blow |
| Warranty | Limited 3 Year (See 009_D for full warranty) |

Features

- 24 V (ac), 40 VA transformer
- Color coded wiring for easy in phase wiring
- Replaceable in-line fuse included
- 4" X 4" electrical J-Box included

SPECIAL REQUIREMENTS

N / A



tekmar Control Systems Ltd., A Watts Water Technologies Company. Head Office: 5100 Silver Star Road, Vernon, B.C. Canada V1B 3K4, 250-545-7749, Fax. 250-545-0650 Web Site: www.tekmarControls.com

